

UPDATING UPDATING UPDATING UPDATING UPDATING UPDATING

Finishing Spec Core

Catalog No. **5000-19-08-05-0005**


190805 E

Rev Level **A**

Picture

1ST ISSUED 4/24/2003

Customer	Customer Part #

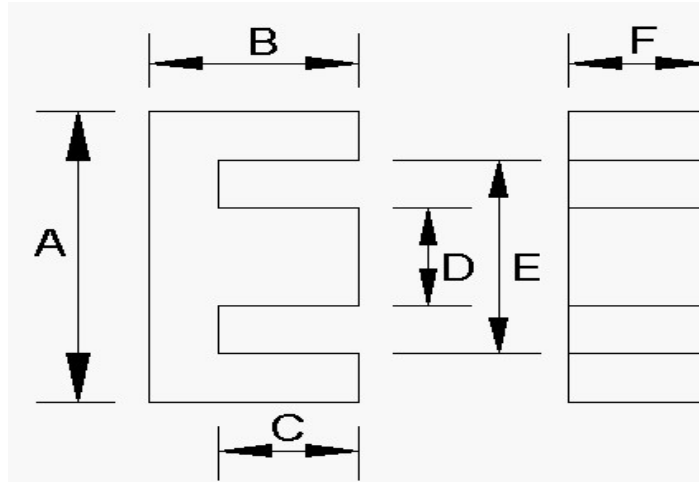

REQUIRED GRINDER BELT SPEED			
GRINDER	UPDATED	M/MIN	INCH/MIN
1	0	0.00	0.00
2	0	0.00	0.00
3	0	0.00	0.00
4	0	0.00	0.00
5	0	0.00	0.00

L % #VALUE!
 Ldc^2/Ve #VALUE!
 Hdc #VALUE!

GRIND SPECS

	B	C	BW	GRIND	GRIND	GAP DEPTH	AL VALUE	L CONTROL LIMIT
	inches	inches	inches	BACKWALL	MATING SURFACE	per pc. (inches)	nH/T^2	mH
Maximum	0.3220	0.2290					2721.1	1.10001
Nominal	0.3170	0.2240		NO	YES		2267.6	1.00001
Minimum	0.3120	0.2170					1814.1	0.90001

L @ DC 1	L @ DC 2
mH min	mH min
ADC (AMPS)	ADC (AMPS)

Inductance (AL) Test Conditions mate with								
Critical Spec. Al or Mech.	Tolerance	1 or 2 core GAP	Coil #	# Turns	Test Frequency kHz	Test Voltage Vrms	Test Flux Density Gauss	Grinding PCS/HR
AL	20%	NO		21	100	1.000	48	

APPROVED FOR PRODUCTION DATE

Comments

QC audit with .015 amps DC bias

Dimensions:	A	D	E	F	G	H	J	COLOR CODE
	inches	inches	inches	inches	inches	inches	inches	
Maximum	0.765	0.191	0.575	0.191				
Nominal	0.750	0.187	0.564	0.187				
Minimum	0.735	0.183	0.553	0.183				

Packaging Comments										
2 BLOCKS OF 37 X 8 LEAVE SPACE BETWEEN BLOCKS										
Packaging										
Method	Die Cut	Type of Box or Bag	pcs/bag or pcs/cell or # rows per board	# columns per board	Pieces / Board	Layers	Spacer Boards	Foam	Pcs/Box	WEIGHT OF BOX APPROX
SKIN	P4400	4400C	37	16	592	8	2	1	4736	28.0