


UPDATING    UPDATING    UPDATING    UPDATING    UPDATING    UPDATING

**Finishing Spec Core**

Catalog No. **50ALL-30-15-09-0001**  
**301509            EFD**

Picture

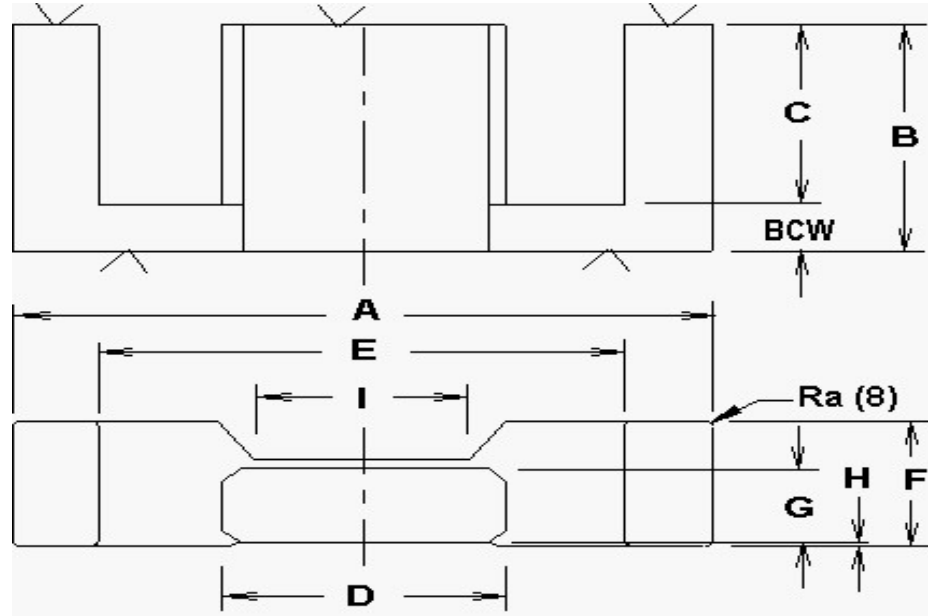

GRIND SPECS	B	C	BW	GRIND BACKWALL	GRIND MATING SURFACE	GAP DEPTH per pc. (inches)	AL VALUE nH/T^2	L CONTROL LIMIT mH
	inches	inches	inches					
Maximum	0.5950	0.4490	0.1540				237.3	0.09266
Nominal	0.5900	0.4410	0.1490	YES	YES	0.0094	226.0	0.09040
Minimum	0.5850	0.4330	0.1440				214.7	0.08814

Inductance (AL) Test Conditions mate with:

Critical Spec. Al or Mech.	Tolerance	1 or 2 core GAP	Coil #	# Turns	Test Frequency	Test Voltage	Test Flux Density
					kHz	Vrms	Gauss
AL	5.00%	TWO	724	20	10	0.06	5

Dimensions:	A	D	E	F	G	H	J	COLOR CODE
	inches	inches	inches	inches	inches	inches	inches	
Maximum	1.213	0.585	0.913	0.365	0.197	0.031		
Nominal	1.181	0.574	0.882	0.358	0.193	0.030		
Minimum	1.149	0.563	0.852	0.351	0.189	0.029		