

UPDATING UPDATING UPDATING UPDATING UPDATING UPDATING

Finishing Spec Core

Catalog No. **7070-20-10-05-0001**

201005


E

Rev Level **B**

Picture

1ST ISSUED

Customer	Customer Part #

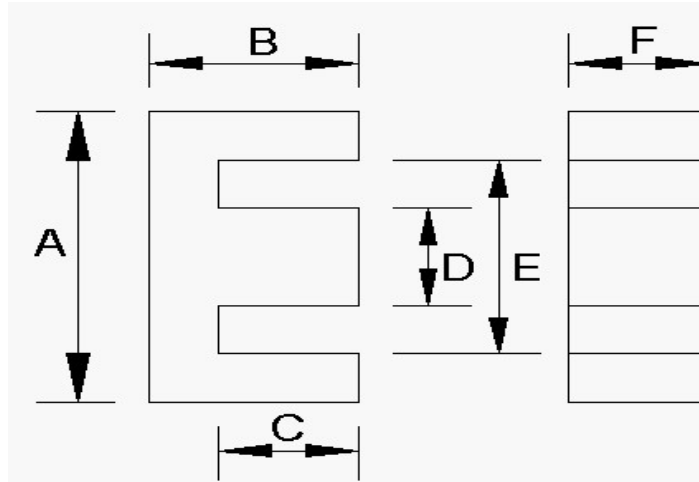

REQUIRED GRINDER BELT SPEED			
GRINDER	UPDATED	M/MIN	INCH/MIN
1	0	0.00	0.00
2	0	0.00	0.00
3	0	0.00	0.00
4	0	0.00	0.00
5	0	0.00	0.00

GRIND SPECS

	B	C	BW	GRIND BACKWALL	GRIND MATING SURFACE	GAP DEPTH per pc. (inches)	AL VALUE nH/T*2	L CONTROL LIMIT mH
	inches	inches	inches					
Maximum	0.3970	0.2880				0.0000	104.0	1.02000
Nominal	0.3900	0.2830		NO	YES	0.0202	100.0	1.00000
Minimum	0.3830	0.2780				0.0000	96.0	0.98000

L @ DC 1	L @ DC 2
mH min	mH min
ADC (AMPS)	ADC (AMPS)

Inductance (AL) Test Conditions mate with: 0								
Critical Spec. Al or Mech.	Tolerance	1 or 2 core GAP	Coil #	# Turns	Test Frequency	Test Voltage	Test Flux Density	Grinding
					kHz	Vrms	Gauss	
AL	4%	ONE	385	100	10	0.070	5	PCS/HR

APPROVED FOR PRODUCTION _____ DATE _____

Comments								

Dimensions:	A	D	E	F	G	H	J	COLOR CODE
	inches	inches	inches	inches	inches	inches	inches	
Maximum	0.803	0.229	0.577	0.219				
Nominal	0.787	0.224	0.566	0.214				0
Minimum	0.771	0.219	0.555	0.209				

Packaging Comments										
Packaging										
Method	Die Cut	Type of Box or Bag	pcs/bag or pcs/cell or # rows per board	# columns per board	Pieces / Board	Layers	Spacer Boards	Foam	Pcs/Box	WEIGHT OF BOX APPROX