

UPDATING UPDATING UPDATING UPDATING UPDATING UPDATING

Finishing Spec Core

Catalog No. **7070-25-13-07-0045**

251307


E

Rev Level **A**

Picture

1ST ISSUED 06/04/07

Customer	Customer Part #

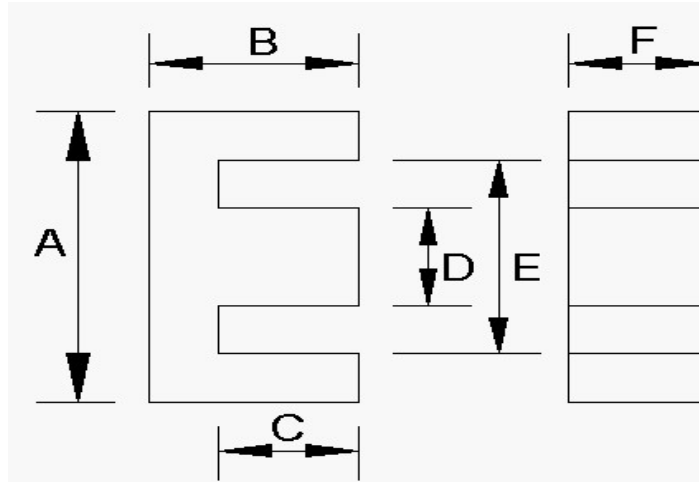

REQUIRED GRINDER BELT SPEED			
GRINDER	UPDATED	M/MIN	INCH/MIN
1	0	0.00	0.00
2	0	0.00	0.00
3	0	0.00	0.00
4	0	0.00	0.00
5	0	0.00	0.00

Gapping Wheel Dimension (Inch)	
Minimum	Maximum

GRIND SPECS

	B	C	BW	GRIND BACKWALL	GRIND MATING SURFACE	GAP DEPTH per pc. (inches)	AL VALUE nH/T*2	L CONTROL LIMIT mH
	inches	inches	inches					
Maximum	0.4990	0.3599					176.0	1.69520
Nominal	0.4940	0.3520		NO	YES	0.0097	163.0	1.63000
Minimum	0.4889	0.3440					150.0	1.56480

L @ DC 1	L @ DC 2
mH min	mH min
ADC (AMPS)	ADC (AMPS)

Inductance (AL) Test Conditions mate with:								Grinding PCS/HR
Critical Spec. Al or Mech.	Tolerance	1 or 2 core GAP	Coil #	# Turns	Test Frequency kHz	Test Voltage Vrms	Test Flux Density Gauss	
AL	8%	TWO	657	100	10	0.120	5	

APPROVED FOR PRODUCTION _____ DATE _____

Comments

Dimensions:	A	D	E	F	G	H	J	COLOR CODE
	inches	inches	inches	inches	inches	inches	inches	
Maximum	1.006	0.295	0.723	0.289				
Nominal	0.986	0.285	0.706	0.283				
Minimum	0.966	0.275	0.689	0.278				

Packaging Comments

1.25" Space between 2 blocks, flip end cores down

Packaging										
Method	Die Cut	Type of Box or Bag	pcs/bag or pcs/cell or # rows per board	# columns per board	Pieces / Board	Layers	Spacer Boards	Foam	Pcs/Box	WEIGHT OF BOX APPROX
SKIN	P4400	4400C	20	12	240	6	2	2	1440	27.2