

UPDATING UPDATING UPDATING UPDATING UPDATING UPDATING

Finishing Spec Core

Catalog No. **7070-30-15-06-0005**

301506


E

Rev Level **B**

Picture

1ST ISSUED 3/26/2001

Customer	Customer Part #

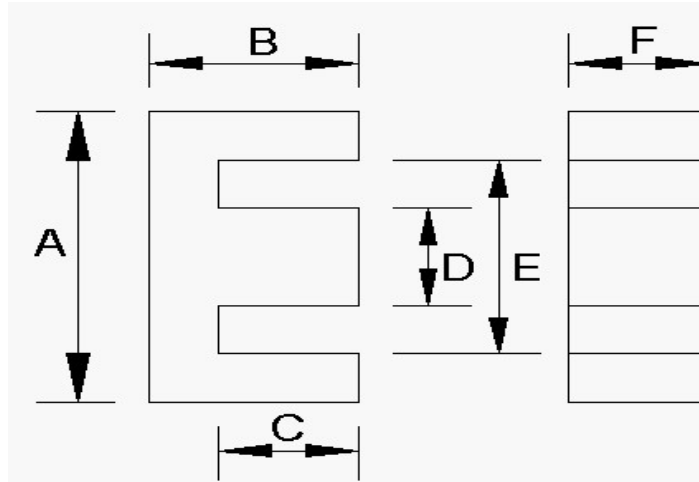

REQUIRED GRINDER BELT SPEED			
GRINDER	UPDATED	M/MIN	INCH/MIN
1	0	0.00	0.00
2	0	0.00	0.00
3	0	0.00	0.00
4	0	0.00	0.00
5	0	0.00	0.00

Gapping Wheel Dimension (Inch)	
Minimum	Maximum
0.478	0.584

GRIND SPECS

	B	C	BW	GRIND BACKWALL	GRIND MATING SURFACE	GAP DEPTH per pc. (inches)	AL VALUE nH/T*2	L CONTROL LIMIT mH
	inches	inches	inches					
Maximum	0.6000	0.4110					105.0	1.02500
Nominal	0.5950	0.4040		NO	YES	0.0162	100.0	1.00000
Minimum	0.5900	0.3970					95.0	0.97500

L @ DC 1	L @ DC 2
mH min	mH min
ADC (AMPS)	ADC (AMPS)

Inductance (AL) Test Conditions mate with:								Grinding PCS/HR
Critical Spec. Al or Mech.	Tolerance	1 or 2 core GAP	Coil #	# Turns	Test Frequency kHz	Test Voltage Vrms	Test Flux Density Gauss	
AL	5%	TWO	717	100	10	0.130	5	

APPROVED FOR PRODUCTION _____ DATE _____

Comments	

Dimensions:	A	D	E	F	G	H	J	COLOR CODE
	inches	inches	inches	inches	inches	inches	inches	
Maximum	1.205	0.275	0.808	0.273				
Nominal	1.181	0.270	0.792	0.268				
Minimum	1.157	0.265	0.776	0.263				

Packaging Comments	
1.25" space between 2 blocks flip end cores down	

Packaging										
Method	Die Cut	Type of Box or Bag	pcs/bag or pcs/cell or # rows per board	# columns per board	Pieces / Board	Layers	Spacer Boards	Foam	Pcs/Box	WEIGHT OF BOX APPROX
SKIN	P4400	4400C	19	8	152	6	0	1	912	23.9