

Finishing Spec Core

Catalog No. **TSF-7070-41-28-11-0000**


**412811 U-core10**

Rev Level **A**

Picture

**1ST ISSUED**

Customer	Customer Part #

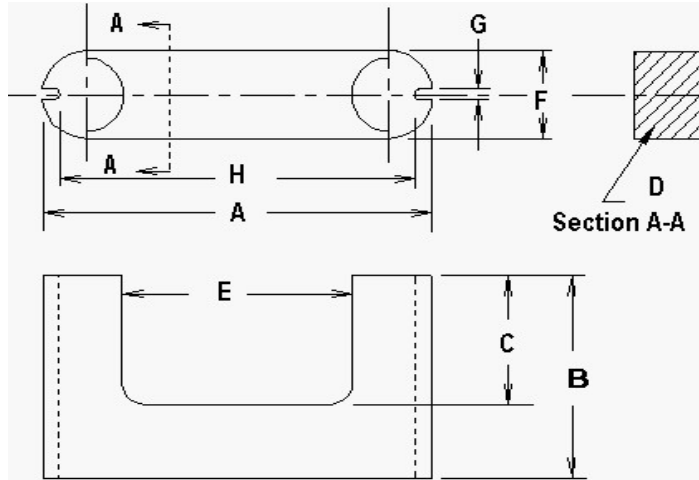

GRIND SPECS

	B	C	BW	GRIND BACKWALL	GRIND MATING SURFACE	GAP DEPTH	AL VALUE	L CONTROL LIMIT
	inches	inches	inches					
Maximum	1.0400	0.6680	0.3800	YES	YES	inches	2406.25	0.8663
Nominal	1.0350	0.6600	0.3750				1925.00	0.7700
Minimum	1.0300	0.6520	0.3700				1443.75	0.6738

APPROVED FOR PRODUCTION \_\_\_\_\_ DATE \_\_\_\_\_

Inductance (AL) Test Conditions mate with								
Critical Spec. Al or Mech.	Tolerance %	1 or 2 core GAP	Coil #	# Turns	Test Frequency kHz	Test Voltage Vrms	Test Flux Density Gauss	Grinding PCS/HR
AL	25.0%	NO		20.0	20.0	0.089	5	5435

**Comments**  
Gauge prior to grinding for leg toe in & out problems

Dimensions:	A	D	E	F	G	H	J	COLOR CODE
	inches	inches	inches	inches	inches	inches	inches	
Maximum	1.620		0.775	0.470	0.130			
Nominal	1.620		0.750	0.460	0.125	1.390		
Minimum	1.640		0.725	0.450	0.120			


Document Produced by deskPDF Unregistered :: http://www.docudesk.com