

UPDATING    UPDATING    UPDATING    UPDATING    UPDATING    UPDATING

**Finishing Spec Core**

Catalog No. **7099-71-33-31-0001**


**713331    E**

Rev Level **A**

Picture

**1ST ISSUED** 1/16/2006

Customer	Customer Part #

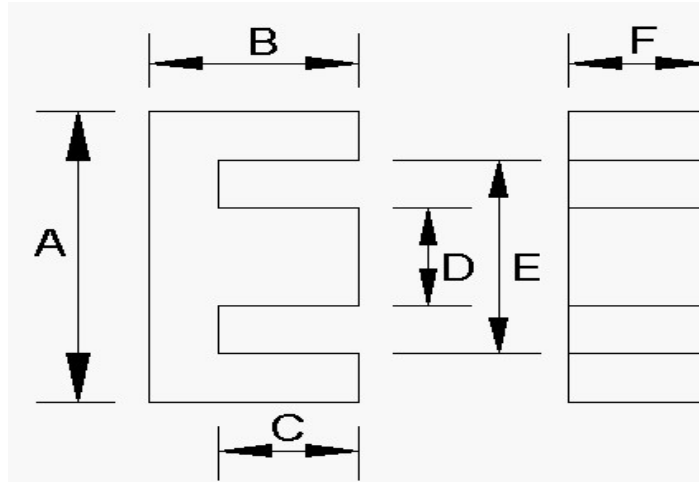

REQUIRED GRINDER BELT SPEED			
GRINDER	UPDATED	M/MIN	INCH/MIN
1	0	0.00	0.00
2	0	0.00	0.00
3	0	0.00	0.00
4	0	0.00	0.00
5	0	0.00	0.00

Gapping Wheel Dimension (Inch)	
Minimum	Maximum
1.247	1.524

**GRIND SPECS**

	B	C	BW	GRIND BACKWALL	GRIND MATING SURFACE	GAP DEPTH per pc. (inches)	AL VALUE nH/T*2	L CONTROL LIMIT mH
	inches	inches	inches					
Maximum	1.3020	0.8890					424.4	4.18180
Nominal	1.2970	0.8760		NO	YES	0.0547	412.0	4.12000
Minimum	1.2920	0.8630					399.6	4.05820

L @ DC 1 mH min	L @ DC 2 mH min
ADC (AMPS)	ADC (AMPS)

Inductance (AL) Test Conditions mate with:								Grinding PCS/HR
Critical Spec. Al or Mech.	Tolerance	1 or 2 core GAP	Coil #	# Turns	Test Frequency kHz	Test Voltage Vrms	Test Flux Density Gauss	
AL	3%	TWO	906	100	1	0.150	4.97	

APPROVED FOR PRODUCTION \_\_\_\_\_ DATE \_\_\_\_\_

**Comments**  
Use gauge #046

Dimensions:	A	D	E	F	G	H	J	COLOR CODE
	inches	inches	inches	inches	inches	inches	inches	
Maximum	2.831	0.869	1.957	1.256				
Nominal	2.775	0.852	1.919	1.231				
Minimum	2.720	0.835	1.881	1.206				

<b>Packaging Comments</b>										
Lay flat with 1" space on all sides and edges, do not use frame										
<b>Packaging</b>										
Method	Die Cut	Type of Box or Bag	pcs/bag or pcs/cell or # rows per board	# columns per board	Pieces / Board	Layers	Spacer Boards	Foam	Pcs/Box	WEIGHT OF BOX APPROX
SKIN	P4400	4400C	3	4	12	3	2	2	36	NA