

UPDATING

UPDATING

UPDATING

UPDATING


UPDATING

UPDATING

**Finishing Spec Core**

Catalog No. **7099-34-00-00-0002**  
**340000 ETD**

Picture

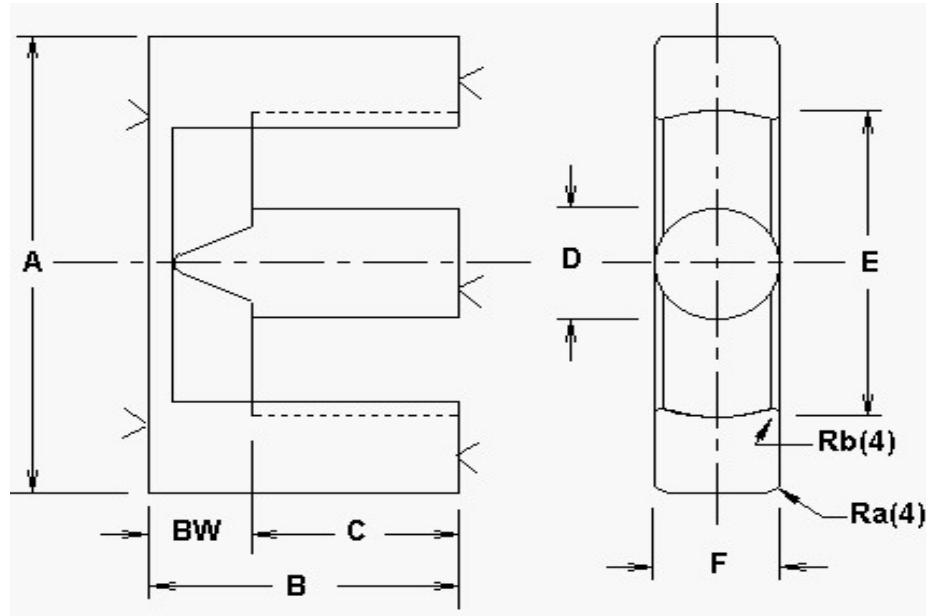

GRIND SPECS	B	C	BW	GRIND BACKWALL	GRIND MATING SURFACE	GAP DEPTH per pc. (inches)	AL VALUE nH/T^2	L CONTROL LIMIT mH
	inches	inches	inches					
Maximum	0.6890	0.4870	0.2130				290.9	1.23678
Nominal	0.6810	0.4760	0.2050	YES	YES	0.0093	277.0	1.20661
Minimum	0.6730	0.4650	0.1970				263.2	1.17645

Inductance (AL) Test Conditions mate with:

Critical Spec. Al or Mech.	Tolerance	1 or 2 core GAP	Coil #	# Turns	Test Frequency	Test Voltage	Test Flux Density
					kHz	Vrms	Gauss
AL	5%	TWO	687	66	100	0.010	0

Dimensions:	A	D	E	F	G	H	J	COLOR CODE
	inches	inches	inches	inches	inches	inches	inches	
Maximum	1.374	0.437	1.063	0.437				
Nominal	1.347	0.425	1.036	0.425				
Minimum	1.320	0.413	1.009	0.413				