


UPDATING    UPDATING    UPDATING    UPDATING    UPDATING    UPDATING

**Finishing Spec Core**

Catalog No. **5099-20-10-07-0002**  
**201007            EFD**

Picture

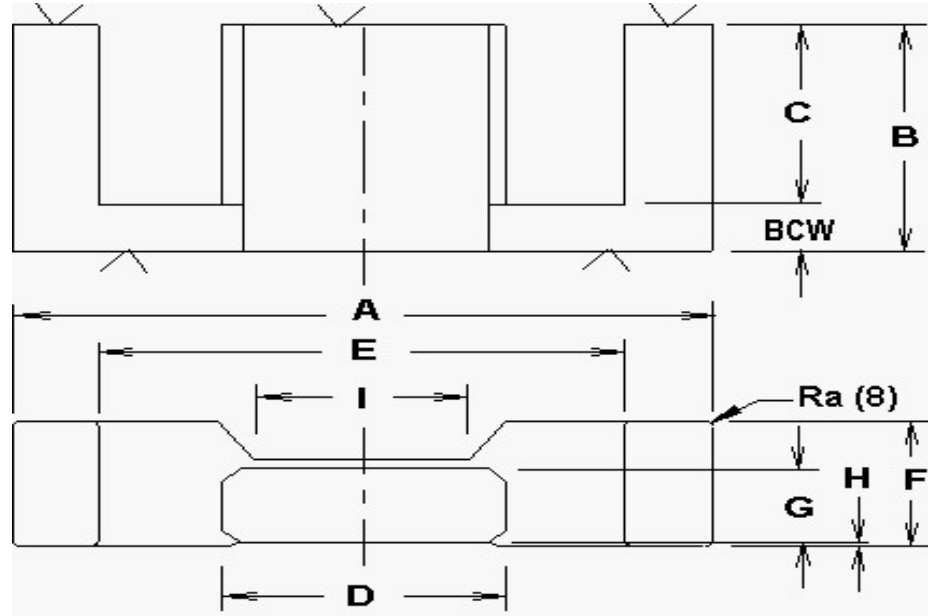

GRIND SPECS	B	C	BW	GRIND BACKWALL	GRIND MATING SURFACE	GAP DEPTH per pc. (inches)	AL VALUE nH/T^2	L CONTROL LIMIT mH
	inches	inches	inches					
Maximum	0.3990	0.3100	0.0960				222.6	2.16300
Nominal	0.3940	0.3030	0.0910	YES	YES	0.0080	210.0	2.10000
Minimum	0.3890	0.2960	0.0860				197.4	2.03700

Inductance (AL) Test Conditions mate with:

Critical Spec. Al or Mech.	Tolerance	1 or 2 core GAP	Coil #	# Turns	Test Frequency	Test Voltage	Test Flux Density
					kHz	Vrms	Gauss
AL	6%	ONE	320	100	10	0.070	5

Dimensions:	A	D	E	F	G	H	J	COLOR CODE
	inches	inches	inches	inches	inches	inches	inches	
Maximum	0.803	0.357	0.618	0.267	0.145			
Nominal	0.787	0.350	0.606	0.262	0.142			
Minimum	0.771	0.343	0.594	0.257	0.139			